



Installation

ENAIKOON locate-04 to the power supply

Straightforward installation

Just connect ENAIKOON locate-04 to the power supply (VCC) and the Digital Input 4 to ignition, attach the GSM/GPS antenna to the related connectors and mount the antenna. That's all.



Digital Output 1, blue

Digital Input 2, yellow

Digital Input 4, green (Ignition - terminal 15):

Please do not connect it to the car radio or to the terminal 15r or terminal 30z or to the cable with tension of the ignition switch 1, connect it directly to the terminal 15 and to the cable with tension of the ignition switch 2.


Battery positive pole, red (terminal 30) 6 - 31 V:

Please connect to a cable with direct connection to the positive pole of the battery or to a VCC supply.

Battery negative pole, black (terminal 31):

Please connect directly to the car body, not to the battery negative pole

We strongly dis advise using cable binders or strip connectors. Please use a soldering pen to connect the cables, and check continuity afterwards.

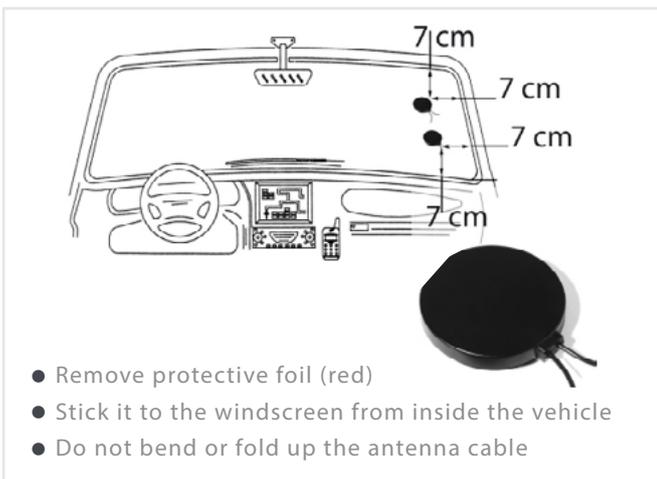

- Remove protective foil (red)
- Stick it to the windscreen from inside the vehicle
- Do not bend or fold up the antenna cable



Please tighten the antenna connectors by hand ONLY!

Ensure that there is no material between the GSM/GPS windscreen antenna that may interfere with the radio transmission, such as metal, water, metal oxide windcreens, or plastic with a metal varnish.

Keep a minimum distance of 1 metre (1 yd) from other antennas mounted to the vehicle (i.e. radio antenna, toll collect antenna, car phone antenna etc.) A minimum distance of 7 cm (2.8 in) must also be kept from the front shield frame.

WARNING: Problems may arise in vehicles with heated or metal oxide windcreens.

ENAIKOON

ENAIKOON GmbH
Helmholtzstr. 2-9
10587 Berlin
Germany

Tel.: +49 30 397475-30
Fax: +49 30 397475-40
info@enaikoon.com
www.enaikoon.com